

11-13-00

A

11/09/00
jc930 U.S. PTO

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington D.C. 20231
Box Patent Applications

Case Docket No. FUJI 17.300
Filed by Express Mail
(Receipt No. EL522396114US)
on November 9, 2000
pursuant to 37 CFR 1.10
by Lydia Gonzalez

S I R:

Transmitted herewith for filing is: ☒ a new application
[] a c-i-p application of S.N. _____ filed _____

Inventor(s): Koji NAKAMICHI; Yutaka EZAKI; Toshio SOUMIYA; Kenya TAKASHIMA

For **METHOD AND APPARATUS FOR SELECTION OF PATHS ON A COMMUNICATION NETWORK**

Enclosed are:

- ☒ 14 sheets of drawings.(Figs. 1-15)
- ☒ Specification, including claims and abstract (50 pages)
- ☒ Declaration
- ☒ An assignment of the Invention to FUJITSU LIMITED
- ☒ A certified copy of Japanese Application No(s). 11-321591
- ☒ An associate power of attorney
- [] A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☒ Post card
- ☒ Recording fee (as indicated below)
- ☒ Information Disclosure Statement, PTO-1449, copies of 2 references
- [] Other _____
- [] Other _____

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	33-20 =	13
INDEP CLAIMS	11-3 =	8
[] MULTIPLE DEPENDENT CLAIMS PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$355
x 9 =	\$
x 40 =	\$
x 135 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$710
x 18 =	\$ 234
x 80 =	\$160
x 270 =	\$
TOTAL	\$1104

[] Please charge our Deposit Account No. 08-1634 the amount of _____ to cover the filing fee and recording fee (if any)

☒ A check in the amount of \$1144.00 to cover the filing fee and the recording fee (if any) is enclosed.


☒ The Commissioner is hereby ~~authorized~~ authorized to charge payment of any fee associated with this communication or credit overpayment to Deposit Account No. 08-1634. A duplicate coy of this sheet is enclosed.

Helfgott & Karas, P.C.
60th Floor
Empire State Building
New York, New York 10118-6098
(212)643-5000

Date: 11/9/00

Any fee due with this paper, not fully covered by an enclosed check, may be charged on Deposit Acct No. 08-1634

Respectfully Submitted,

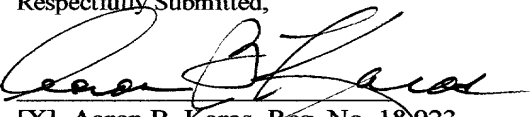

- ☒ Aaron B. Karas, Reg. No. 18,923
- [] Samson Helfgott, Reg. No. 23,072
- [] Leonard Cooper, Reg. No. 27, 625
- [] Linda S. Chan, Reg. No. 42,400
- [] Harris A. Wolin , Reg. No. 39,432
- [] Brian S. Myers, Reg. No. 46,947

jc914 U.S. PTO
09/709230
11/09/00

TITLE OF THE INVENTION

METHOD AND APPARATUS FOR SELECTION OF
PATHS ON A COMMUNICATION NETWORK

FIELD OF THE INVENTION

The present invention relates to a method and apparatus for selecting paths to route incoming traffic through a data communication network in which a plurality of label switched paths between the ingress node and the egress node of the network are provided, and in which the incoming traffic at the ingress node is labeled and delivered through the network to the egress node.

BACKGROUND OF THE INVENTION

Recently, there is a rapid growth of Internet communications since various Internet Protocol (IP)-based applications have become available. Multiprotocol Label Switching (MPLS) is an evolving standard that is intended for such Internet applications.

Multiprotocol Label Switching (MPLS) is a widely supported method of speeding up IP-based data communication over communication networks, such as asynchronous transfer mode (ATM) networks. As IP and ATM come together, the MPLS concept is to route a packet at the edge of the network and switch the packet in the core of the network. In other words, routers are used at the ingress and egress edges of the network, where their high levels of intelligence can be best used and where their inherent slowness can be tolerated. Switches are used in the core of the network, where they can take advantage of the intelligent routing instructions provided by the routers, and where their inherent speed

offers great advantage.

In an MPLS network, an IP data stream enters the edge of the network, and the ingress router reads the full address of the first data packet and attaches a small label in the packet header, which precedes the packet. The ATM switches in the core of the network examine the much-abbreviated label, and switch the packet with much greater speed than if they were forced to consult programmed routing tables associated with the full IP address. All subsequent packets in a data stream are automatically labeled in this manner, and very quickly switched as they have been anticipated.

In the MPLS scheme, a plurality of label switched paths (LSP) between the ingress node and the egress node on the network are provided, and a data packet with a fixed-size label attached is delivered on the plurality of LSPs. The routers at nodes of the MPLS network are called label switching routers (LSR) in this scheme. The label switching routers can deliver the incoming packet on the LSPs by reading the address information of the packet in the fixed-size label. By making use of the MPLS scheme, it is expected that the IP-based data communication over the communication networks can be speeded up and the concentration of traffic load on a specific path of the network can be avoided.

Further, there has been of great interest in that the scheme of MPLS adaptive traffic engineering (often called MATE) has the potential for more effectively optimizing the use of network resources as compared with that in the conventional IP-based communication networks. In order to achieve this scheme, it is desired to provide a data communication network having a capability of selecting a plurality of paths passing

through a router at an arbitrary node of the network when transmitting data on the network.

Further, the concept of the MPLS does not rely on the communication medium through which data is transmitted. In the above-described MPLS scheme, data communication may be carried out through any communication media, including an ATM network, a frame relay network, a point-to-point link, etc. In a case of the ATM network, the label provided by the MPLS scheme is attached in the VPI/VCO field of an ATM cell header. The ATM network is a high-speed scheme using the transmission of fixed-size cells and intended for broadband integrated services digital network (B-ISDN) services. The ATM network is currently implemented in various areas of the field and provided with an adequate capability of supporting quality-of-service (QOS) classes for the expected B-ISDN services.

In the existing IP packet-switched network, such as the Internet, the routing of an incoming packet through the network is determined according to the existing routing protocol in a self-controlled manner. For example, the Open Shortest Path First (OSPF) algorithm is a typical one of the routing protocols that have been commonly used. The OSPF algorithm is a link-state routing algorithm that is used to calculate routes based on the number of routers, transmission speed, delays and route cost. When the OSPF algorithm is used as the routing protocol, the shortest path of the packet to its destination router on the network is automatically selected first.

However, the above-mentioned routing protocol, that is, selecting the shortest path on the network first, does not always result in an efficient use of the network resources. For example, when the channel capacity of the link on the selected shortest

path is less than the data rate of the incoming packets, the traffic load on the shortest path becomes too heavy, which will cause a congestion condition of the path in the network.

Further, in the case of the above-mentioned routing protocol, a single path for routing the packet to its destination router on the network is automatically selected. It is impossible that the above routing protocol is used to select two or more paths for routing the packet to its destination on the network. Hence, when the above routing protocol is used, it is difficult to disperse the incoming traffic load to the two or more paths within the network.

Accordingly, it is an object of the present invention to provide a novel, useful method and apparatus for selection of paths to route an incoming traffic through a data communication network, which is capable of effectively dispersing the traffic load to the selected paths on the network and effectively optimizing the use of network resources.

SUMMARY

In order to overcome the above-described problems and achieve the above-described object of the present invention, the invention provides a method for selecting paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, the method includes allocating a plurality of forwarding elements of the incoming traffic at the ingress node for the plurality of label switched paths; and delivering the labeled traffic on the plurality of label switched paths on a forwarding element basis so as to route the labeled traffic through the network to the egress node.

The above-described invention may further equally allocate the forwarding elements for the plurality of label switched paths.

According to the above-described invention, the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. Reversing of a sequence (receiving out of order) of data packets sent by the same terminal, at the egress node of the network can be effectively reduced.

A further embodiment provides a method for selection of paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, the method includes allocating a plurality of forwarding equivalent class (FEC) elements of the incoming traffic at the ingress node for the plurality of label switched paths, the respective label switched paths being tied to physical links having predetermined data rates, and the number of FEC elements allocated for each of the label switched paths being proportional to the predetermined data rate of the label switched path; and delivering the labeled traffic on the plurality of label switched paths on an FEC-element basis so as to route the labeled traffic through the network to the egress node.

According to the above-described invention, the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. Concentration of the traffic load on a specific path of the network can be effectively avoided.

Another method for the selection of paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, the method includes allocating a plurality of FEC elements of the incoming traffic at the ingress node for the plurality of label switched paths, the respective label switched paths being tied to physical links having predetermined weight factors, and the number of FEC elements allocated for each of the label switched paths being proportional to the predetermined weight factor of the physical links; and delivering the labeled traffic on the plurality of label switched paths on an FEC-element basis so as to route the labeled traffic through the network to the egress node.

According to the above-described invention, the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. The traffic load dispersion to the selected paths can be effectively suited to the network management conditions specified by a network administrator.

The invention further provides a method for selection of paths to route an incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, the method includes assigning one of a set of priorities for each of the plurality of physical links and the plurality of label switched paths being allocated to the physical links; allocating a plurality of forwarding equivalent class (FEC) elements of the incoming

traffic at the ingress node for the plurality of label switched paths in order of the respective priorities of the plurality of physical links until an amount of the traffic delivered on one of the plurality of physical links having a first priority; and delivering the labeled traffic on the plurality of label switched paths on an FEC-element basis so as to route the labeled traffic through the network to the egress node, wherein, after the amount of the traffic delivered on the one of the plurality of physical links has exceeded the predetermined threshold, the traffic is routed to others of the plurality of label switched paths having physical links of a second priority lower than the first priority of the one of the plurality of physical links.

According to the above-described invention, the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. By assigning the first priority for main route paths of the network and the second priority for sub-route paths of the network, the traffic load dispersion to the selected paths can be effectively achieved.

Another embodiment provides a method for selecting paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, the method includes allocating a plurality of FEC priorities for a plurality of forwarding equivalent class FEC elements of the incoming traffic at the ingress node; assigning one of a set of priorities for each of the plurality of physical links and allocating the plurality of label switched paths to the plurality of physical links; allocating the plurality of FEC elements

of the incoming traffic at the ingress node for the plurality of label switched paths in order of the respective priorities of the plurality of physical links and in order of the respective FEC priorities of the plurality of FEC elements; and delivering the labeled traffic on the plurality of label switched paths on an FEC-element basis so as to route the labeled traffic through the network to the egress node.

According to the above-described invention, the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. The traffic load dispersion to the selected paths can be achieved with increased flexibility by the allocation of the path priorities and the FEC priorities specified by a network administrator.

The invention provides an ingress-node apparatus for path selection to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node. An FEC allocation unit equally allocates a plurality of FEC elements of the incoming traffic at the ingress node for the plurality of label switched paths; and a traffic delivery unit which delivers the labeled traffic on the plurality of label switched paths on an FEC-element basis so as to route the labeled traffic through the network to the egress node.

According to the above-described invention, the selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources.

Reversing of a sequence of data packets sent by the same terminal (packets out of order), at the egress node of the network can be effectively reduced.

The invention further provides an ingress-node apparatus for selection of paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node. An FEC allocation unit which allocates a plurality of forwarding equivalent class FEC elements of the incoming traffic at the ingress node for the plurality of label switched paths, the respective label switched paths being tied to a plurality of physical links having predetermined data rates, and the number of FEC elements allocated for each of the label switched paths being proportional to the predetermined data rate of the physical links. A traffic delivery unit delivers the labeled traffic on the plurality of label switched paths on a FEC-element basis so as to route the labeled traffic through the network to the egress node.

According to the above-described invention, the apparatus for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. Concentration of the traffic load on a specific path of the network can be effectively avoided.

Another embodiment provides an ingress-node apparatus for selection of paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the

egress node, the apparatus including: an FEC allocation unit which allocates a plurality of forwarding equivalent class FEC elements of the incoming traffic at the ingress node for the plurality of label switched paths, the respective label switched paths being tied to a plurality of physical links having predetermined weight factors, and the number of FEC elements allocated for each of the label switched paths being proportional to the predetermined weight factor of the physical link; and a traffic delivery unit which delivers the labeled traffic on the plurality of label switched paths on an FEC-element basis so as to route the labeled traffic through the network to the egress node.

According to the above-described invention, the apparatus for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. The traffic load dispersion to the selected paths can be effectively suited to the network management conditions specified by a network administrator.

The invention further provides an ingress-node apparatus for selection of paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, and one of a set of priorities is assigned for each of the plurality of physical links and the plurality of label switched paths being allocated to the physical links. An FEC allocation unit allocates a plurality of forwarding equivalent class (FEC) elements of the incoming traffic at the ingress node for the plurality of label switched paths in order of the respective priorities of the plurality of physical links until an amount of the traffic delivered on one of the plurality of physical links having a first priority exceeds a

predetermined threshold; and a traffic delivery unit delivers the labeled traffic on the plurality of label switched paths on an FEC-element basis so as to route the labeled traffic through the network to the egress node. After the amount of the traffic delivered on the one of the plurality of physical links has exceeded the predetermined threshold, the traffic is routed to others of the plurality of physical links having a second priority lower than the first priority of the one of the plurality of physical links.

According to the above-described invention, the apparatus for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. By assigning the first priority for main route paths of the network and the second priority for sub-route paths of the network, the traffic load dispersion to the selected paths can be effectively achieved.

The invention further provides an ingress-node apparatus for selection of paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, a plurality of FEC priorities being allocated for a plurality of forwarding equivalent class FEC elements of the incoming traffic at the ingress node, and one of a set of priorities being assigned for each of the plurality of physical links and the plurality of label switched paths being allocated to the plurality physical links. An FEC allocation unit allocates the plurality of FEC elements of the incoming traffic at the ingress node for the plurality of label switched paths in order of the respective priorities of the plurality of label switched paths and in order of the respective FEC priorities of the plurality of FEC

elements; and a traffic delivery unit delivers the labeled traffic on the plurality of label switched paths on an FEC-element basis so as to route the labeled traffic through the network to the egress node.

According to the above-described invention, the apparatus for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. The traffic load dispersion to the selected paths can be achieved with increased flexibility by the allocation of the path priorities and the FEC priorities specified by a network administrator.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram for explaining the concept of LSP (Label Switched Path) load dispersion in MPLS adaptive traffic engineering (MATE) according to the path selection method of the invention.

FIG. 2 is a block diagram of an ingress LSR (Label Switched Router) on an MPLS network to which the MPLS adaptive traffic engineering is applied.

FIG. 3 is a diagram for explaining an FEC (Forward Equivalent Class) routing table in the ingress LSR.

FIG. 4 is a diagram for explaining an FEC-label mapping table in the ingress LSR.

FIG. 5 is a diagram for explaining an FEC-label mapping table in a first preferred embodiment of the ingress LSR.

FIG. 6 is a diagram for explaining an FEC-label mapping table in a second preferred embodiment of the ingress LSR.

FIG. 7 is a diagram for explaining an FEC-label mapping table in a third preferred embodiment of the ingress LSR.

FIG. 8 is a diagram for explaining an FEC-label mapping table in a fourth preferred embodiment of the ingress LSR.

5 FIG. 9 is a diagram for explaining an FEC-label mapping table in the fourth preferred embodiment of the ingress LSR.

FIG. 10 is a diagram for explaining an FEC-label mapping table in a fifth preferred embodiment of the ingress LSR.

FIG. 11 is a block diagram of an intermediate LSR on the MPLS network.

10 FIG. 12 is a diagram for explaining a label mapping table in the intermediate LSR.

FIG. 13 is a block diagram of an egress LSR on the MPLS network.

FIG. 14 is a diagram for explaining the relationship between a physical link (port), LSPs, and FECs.

15 FIG. 15 is a diagram for explaining packet forwarding using the FEC-Label Mapping Table of FIG. 5

DETAILED DESCRIPTION

A description will now be provided of preferred embodiments of the present invention with reference to the accompanying drawings.

20 The scheme of MultiProtocol Label Switching MPLS adaptive traffic engineering (often called MATE) has the potential for effectively optimizing the use of network resources. In order to achieve this scheme, it is desired to provide a data communication

network having a capability of selecting a plurality of paths passing through a router at an arbitrary node of the network when transmitting data on the network.

For example, when the traffic load on a certain path becomes too heavy, another path having a larger capacity can be selected for transmitting the traffic through the other path with the large capacity, rather than through the overloaded path. Hence, by making use of the MPLS, the traffic load can be effectively dispersed to the selected paths on the network and a long-term congestion state of the network can be avoided. If a plurality of label switched paths within the MPLS network are predefined for transmitting the incoming traffic addressed to a same destination according to the load dispersion capability of the MPLS, it is possible to disperse the incoming traffic load to the selected ones of the plurality of paths by routing the majority part of the incoming traffic to the selected paths and the remainder to other paths of the plurality of paths. In addition to the load dispersion capability provided by the MPLS, it is possible to attach a small, much-abbreviated label in the packet header, which is arbitrarily selected regardless of the IP address of the packet. Hence, it is possible to easily carry out the load dispersion routing to the label switched paths.

Further, in the MPLS scheme, an incoming data packet at the ingress node of the network is grouped into a plurality of FEC (forwarding equivalent class) elements, and the plurality of FEC elements of the packet are allocated for the plurality of label switched paths on the network on an FEC-element basis. The grouping of the packet into the FEC elements can be arbitrarily performed, which need not be in conformity with the full IP address carried by the packet. For example, the grouping of the packet into the FEC elements may be performed by using either the prefix or part of the IP address of the

packet or the destination IP address of the packet. FIG. 1 shows the concept of the label switched path (LSP) load dispersion in the MPLS adaptive traffic engineering (MATE) according to the method of the present invention.

FIG. 14 shows the concept of the relationship between a physical link (port), label switched paths, and forward equivalent class elements (FECs).

In FIG. 1, a traffic engineering area of a label switching network (hereinafter called MPLS network) between ingress LSR (label switching router) 10 and an egress LSR 12 is illustrated. In the traffic engineering area between the ingress LSR 10 and the egress LSR 12, a label switched path (LSP) 21 and a label switched path (LSP) 22 are predefined.

For the sake of simplicity of description, suppose that only two LSPs are provided in the traffic engineering area of the MPLS network. However, it would be readily understood that three or more LSPs may be provided in the traffic engineering area of the MPLS network. Further, the data rate of the physical link of LSP 21 and the data rate of the physical link of LSP 22 may be different from each other. Generally, a packet-switched network, such as the MPLS network, can carry out data-rate conversion. Two routers of different data rates can exchange packets, since each connects to its node at its proper data rate.

Suppose that, in the MPLS network of FIG. 1, the LSP 21 extends from the ingress LSR 10 to the egress LSR 12 through two intermediate LSRs 13 and 14, while the LSP 22 extends from the ingress LSR 10 to the egress LSR 12 through two intermediate LSRs 15 and 16.

In accordance with network management conditions specified by a network

administrator, an incoming data packet at the ingress LSR 10 is grouped into a plurality of FEC elements, such as FEC#1, FEC#2, FEC#3 and FEC#4, and the plurality of FEC elements of the incoming packet are allocated for the label switched paths 21 and 22. Hereinafter, FEC#1 and others are called FEC IDs. One or more FEC elements can be allocated for a single label switched path and one or more label switched paths may be allocated to a single physical link. A plurality of FEC IDs are predetermined for the FEC elements allocated for the label switched paths 21 and 22 at the ingress LSR 10.

In the present embodiment, as shown in FIG. 1, the FEC #1 and the FEC #2 are allocated for the LSP 21, and the FEC #3 and the FEC #4 are allocated for the LSP 22. In order to attain the LSP load dispersion on the MPLS network, the distribution of data elements of the incoming packet to the respective label switched paths within the MPLS network in the present embodiment is performed on an FEC-element basis.

Further, suppose that the MPLS network of the present embodiment to which the MPLS adaptive traffic engineering is applied is intended for speeding up data communication over an ATM network. Suppose that a separate IP-based network, other than the ATM network, is connected to the egress edge of the MPLS network of the present embodiment.

FIG. 2 is a block diagram of the ingress LSR 10 on the MPLS network to which the MPLS adaptive traffic engineering is applied.

As shown in FIG. 2, the ingress LSR 10 generally comprises a header analysis unit 31, an FEC retrieval unit 32, an FEC routing table 34, an ATM cell generator unit 33, an FEC-label mapping unit 35, and an FEC-label mapping table 36. As a stream of IP

data packets enter the ingress edge of the MPLS network, the first incoming data packet is received at an input terminal 30 of the header analysis unit 31.

In the ingress LSR of FIG. 2, the header analysis unit 31 analyzes the IP packet header, which precedes the incoming data packet. The header analysis unit 31 reads, from the header, a source IP address, a destination IP address, a source TCP/UDP port identifier, a destination TCP/UDP port identifier. The header analysis unit 31 supplies the read header elements to the FEC retrieval unit 32, and, in parallel to this, the header analysis unit 31 supplies the data packet to the ATM cell generator unit 33.

In the ingress LSR of FIG. 2, the FEC retrieval unit 32 produces a specific FEC ID (and its FEC priority) from the received header elements (the source IP address, the destination IP address, the source TCP/UDP port ID, the destination TCP/UDP port ID) by retrieving the FEC routing table 34 (shown in FIG. 3) based on the received header elements. The specific FEC ID, obtained by the FEC retrieval unit 32, is used to determine a forwarding equivalent class FEC to which the incoming data packet pertains.

FIG. 3 shows an FEC routing table 34 in the ingress LSR of FIG. 2. For example, the FEC routing table 34 is stored in a memory of the ingress LSR 10. As shown in FIG. 3, the FEC routing table 34 contains a plurality of records corresponding to a plurality of predetermined FEC IDs, each record having a source IP address field, a destination IP address field, a source TCP/UDP port ID field, a destination TCP/UDP port ID field, and an FEC priority field, corresponding to one of the plurality of predetermined FEC IDs allocated for the label switched paths 21 and 22.

In the FEC routing table of FIG. 3, the source IP address field defines an IP address of a source terminal or an IP address of an external network including the source

terminal. In a case of the source terminal's IP address, the source IP address is a unique, 32-bit terminal address identifier that is expressed in dotted decimal form with four address fields, such as "10.25.1.1". In a case of the network's IP address, the source IP address is a unique network address identifier that is expressed in dotted decimal form with four address fields with a prefix, such as "10.25.2.0/24". The prefix "/24" in the example "10.25.2.0/24" means that only the upper 24 bits of the 32-bit identifier are valid to identify the source network address, that is, the source network IP address is "10.25.2".

In the FEC routing table of FIG. 3, the destination IP address field defines an IP address of a destination terminal or an IP address of an external network including the destination terminal. In a case of the destination terminal's IP address, the destination IP address is a unique, 32-bit terminal address identifier that is expressed in dotted decimal form with four address fields, such as "10.25.1.1". In a case of the network's IP address, the destination IP address is a unique network address identifier that is expressed in dotted decimal form with four address fields with a prefix, such as "10.25.2.0/24". The prefix "/24" in the example "10.25.2.0/24" means that only the upper 24 bits of the 32-bit identifier are valid to identify the destination network address, that is, the destination network's IP address is "10.25.2".

In the FEC routing table of FIG. 3, the source TCP/UDP port ID field defines a TCP (transmission control protocol) port identifier or UDP (user datagram protocol) port identifier of the source terminal. The source TCP/UDP port ID is obtained by reading the TCP/UDP packet header included in the IP packet. For example, the source TCP/UDP port ID "20", shown in FIG. 3, means that an FTP (file transfer protocol) application as a TCP layer application, is the source of the incoming IP packet.

In the FEC routing table of FIG. 3, the destination TCP/UDP port ID field defines a TCP port identifier or UDP port identifier of the destination terminal. The destination TCP/UDP port ID is obtained by reading the TCP/UDP packet header included in the IP packet. The FEC routing table of FIG. 3 contains both the source TCP/UDP port ID field and the destination TCP/UDP port ID field. Generally, the port ID, designated by the client, is exchanged between the client and the server. However, it is uncertain whether the client or the server is the source terminal or the destination terminal. Hence, the FEC routing table of FIG. 3 contains both the source port ID field and the destination port ID field.

Further, in the FEC routing table of FIG. 3, the FEC priority field defines an FEC priority that is used to set a specific priority level for one of the plurality of predetermined FEC IDs allocated for the label switched paths 21 and 22.

In the ingress LSR of FIG. 2, the FEC retrieval unit 32 supplies the specific FEC ID (and its FEC priority), obtained by retrieving the FEC routing table 34 based on the above packet header elements, to the FEC-label mapping unit 35.

The FEC-label mapping unit 35 is connected to the FEC-label mapping table 36, and produces a specific label value and a specific output port ID from the received FEC ID by retrieving the FEC-label mapping table 36 (which is shown in FIG. 4) based on the FEC ID. The FEC-label mapping unit 35 supplies the label value and the output port ID to the ATM cell generator unit 33.

FIG. 4 shows an FEC-label mapping table 36 in the ingress LSR of FIG. 2. For example, the FEC-label mapping table 36 is stored in a memory of the ingress LSR 10. As shown in FIG. 4, the FEC-label mapping table 36 contains a plurality of records

corresponding to the plurality of predetermined FEC IDs, each record having a label value address field and an output port ID, corresponding to one of the plurality of predetermined FEC IDs allocated for the label switched paths. In the example of FIG. 4 there are four label switched paths and each label switched path is allocated to a different physical link.

As shown in FIG. 4, the predetermined FEC IDs, such as #1, #2, etc., in the FEC-label mapping table are the same as those corresponding elements in the FEC routing table of FIG. 3. The label value field of each record in the FEC-label mapping table of FIG. 4 defines a label value corresponding to one of the predetermined FEC IDs, such as L0, L1, etc. The output port ID field in the FEC-label mapping table defines an output port ID corresponding to one of the predetermined FEC IDs, such as P0, P1, etc. FIG. 14 shows the relationship between the output port, label switched paths, and the FECs.

In the ingress LSR of FIG. 2, the ATM cell generator unit 33 generates an ATM cell from the IP data packet sent by the header analysis unit 31. In parallel to this, the ATM cell generator unit 33 produces a label from the label value sent by the FEC-label mapping unit 35, and attaches the label to the header (the VPI/VCI field) of the ATM cell. In the header format of the ATM cell, the virtual path identifier (VPI) is 8 bits at the user-network interface and 12 bits at the network-network interface, allowing for more virtual paths to be supported within the network. The virtual channel identifier (VCI) is used for routing to and from the end user.

The ATM cell generator unit 33 delivers the labeled ATM cell from its output port indicated by the output port ID (sent by the FEC-label mapping unit 35), to the individual downstream LSR on the MPLS network.

A description will now be given of a first preferred embodiment of the path selection method and apparatus of the present invention with reference to FIG. 5.

FIG. 5 shows an FEC-label mapping table in the first preferred embodiment of the ingress LSR on the MPLS network.

5 In the present embodiment, the ingress LSR 10 generally comprises the header analysis unit 31, the FEC retrieval unit 32, the FEC routing table 34, the ATM cell generator unit 33, the FEC-label mapping unit 35 and the FEC-label mapping table 36, which are essentially the same as corresponding elements in FIG. 2 except that the FEC-label mapping table 36 in the present embodiment is configured as shown in FIG. 5, and
10 the FEC-label mapping unit 35 produces the label value and the output port ID in response to the FEC ID by retrieving the FEC-label mapping table of FIG. 5.

As shown in FIG. 5, in the FEC-label mapping table 36 of the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node of the MPLS network are equally allocated for the plurality of label switched paths (LSPs).
15 Suppose that, in the example of FIG. 5, the number of the FEC IDs in the FEC-label mapping table 36 is 10, and the number of the output ports in the table 36 is 5. In this example the number of output ports corresponds to the number of LSPs in the network by chance. In such a case, two of the ten FEC IDs are allocated to one of the five output port IDs as shown in FIG. 5. The relationship between the FEC IDs, the label switched paths,
20 and the physical link (output port) is shown in FIG. 15.

In the ingress LSR 10 in which the FEC-label mapping table 36 of FIG. 5 is incorporated, the FEC retrieval unit 32 and the FEC-label mapping unit 35 equally allocate the plurality of FEC elements of the incoming traffic at the ingress node for the

plurality of LSPs, as shown in FIG. 15. The ATM cell generator unit 33 delivers the labeled traffic on the plurality of LSPs on an FEC-element basis so as to route the labeled traffic through the MPLS network to the egress node.

In the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node are equally allocated for the label switched paths and the label switched paths are equally allocated to the physical links, and the labeled traffic is delivered on the selected paths on an FEC-element basis. The path selection method and apparatus of the present embodiment is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. In particular, the reversing of the sequence of data packets sent by the same terminal, at the egress node (the egress LSR 12) of the network can be effectively prevented. Although the FEC IDs are equally allocated in this embodiment that would not necessarily have to be the case.

In the above-described embodiment, the delivery of the labeled traffic on the selected paths is performed at the ingress LSR 10 on an FEC-element basis. Alternatively, the delivery of the labeled traffic on the selected paths may be performed on a packet basis. In the alternative embodiment, it is possible to effectively disperse the traffic load on the individual paths into the selected paths. However, if the incoming traffic is divided into a series of packets, such packets will be delivered on different paths of the network to the egress node. In such a case, it is necessary that the egress LSR 12 reassemble the packets, received from the different paths, into the original message.

A description will now be given of a second preferred embodiment of the path selection method and apparatus of the present invention with reference to FIG. 6.

FIG. 6 shows an FEC-label mapping table in the second preferred embodiment of the ingress LSR on the MPLS network.

In the present embodiment, the ingress LSR 10 generally comprises the header analysis unit 31, the FEC retrieval unit 32, the FEC routing table 34, the ATM cell generator unit 33, the FEC-label mapping unit 35 and the FEC-label mapping table 36, which are essentially the same as corresponding elements in FIG. 2 except that the FEC-label mapping table 36 in the present embodiment is configured as shown in FIG. 6, and the FEC-label mapping unit 35 produces the label value and the output port ID in response to the FEC ID by retrieving the FEC-label mapping table of FIG. 6.

As shown in FIG. 6, in the FEC-label mapping table 36 of the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node of the MPLS network are allocated for the plurality of LSPs such that the respective LSPs which are allocated to physical links which have predetermined data rates and the number of FEC elements, allocated for each physical link, is proportional to the predetermined data rate of that physical link.

Suppose that, in the example of FIG. 6, the number "M" of the FEC IDs in the FEC-label mapping table 36 is 10, and the number of the output ports in the table 36 is 3. Further, in the example of FIG. 6, the corresponding physical link for the output port P0 has a first data rate "a" (= 1 Mbps), the corresponding physical link for the output port P1 has a second data rate "b" (= 3 Mbps), and the corresponding physical link for the output port P2 has a third data rate "c" (= 6 Mbps).

In the above-mentioned case, the number of FEC elements allocated for the LSP1 (which is indicated by "L0"), the number of FEC elements allocated for the LSP2, LSP3,

and LSP4 (which is indicated by "L1-L3"), and the number of FEC elements allocated for the LSP5-LSP10 (which is indicated by "L4-L9") are determined in accordance with the following equations.

$$L0 = M*a/(a + b + c)$$

$$L1-L3 = M*b/(a + b + c)$$

$$L4-L9 = M*c/(a + b + c)$$

Substituting $M=10$, $a=1$, $b=3$, and $c=6$ into the above equations yields $L0=1$, $L1-L3=3$, and $L4-L9=6$. As in the FEC-label mapping table of FIG. 6, the FEC#1 is allocated for the output port P0 (corresponding to the LSP1 in this example), the FEC#2, FEC#3 and FEC#4 are allocated for the output port P1 (corresponding to the L1-L3 in this example), and the FEC#5-FEC#10 are allocated for the output port P2 (corresponding to the L4-L9 in this example).

In the ingress LSR 10 in which the FEC-label mapping table 36 of FIG. 6 is incorporated, the FEC retrieval unit 32 and the FEC-label mapping unit 35 allocate the plurality of FEC elements of the incoming traffic at the ingress node for the plurality of LSPs such that the number of FEC elements allocated for each of the LSPs is proportional to the predetermined data rate of the physical link. The ATM cell generator unit 33 delivers the labeled traffic on the plurality of LSPs on an FEC-element basis so as to route the labeled traffic through the MPLS network to the egress node.

In the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node are allocated for the label switched paths in the data-rate-proportional manner, and the labeled traffic is delivered on the selected paths on an FEC-element basis. The path selection method and apparatus of the present embodiment is effective in

dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. In particular, concentration of the traffic load on a specific path of the network can be effectively avoided. This will be effective in preventing the slowness of data transmission on the communication network caused by the delay of the specific path where the traffic load is concentrated.

A description will now be given of a third preferred embodiment of the path selection method and apparatus of the present invention with reference to FIG. 7.

FIG. 7 shows an FEC-label mapping table in the third preferred embodiment of the ingress LSR on the MPLS network.

In the present embodiment, the ingress LSR 10 generally comprises the header analysis unit 31, the FEC retrieval unit 32, the FEC routing table 34, the ATM cell generator unit 33, the FEC-label mapping unit 35 and the FEC-label mapping table 36, which are essentially the same as corresponding elements in FIG. 2 except that the FEC-label mapping table 36 in the present embodiment is configured as shown in FIG. 7, and the FEC-label mapping unit 35 produces the label value and the output port ID in response to the FEC ID by retrieving the FEC-label mapping table of FIG. 7.

As shown in FIG. 7, in the FEC-label mapping table 36 of the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node of the MPLS network are allocated for the plurality of LSPs. The plurality LSPs is tied to the physical links such that the respective physical links have predetermined weight factors, and the number of FEC elements, allocated for each physical link, is proportional to the predetermined weight factor of that physical link.

Suppose that, in the example of FIG. 7, the number "M" of the FEC IDs in the

FEC-label mapping table 36 is 10, and the number of the output ports in the table 36 is 3.

Further, in the example of FIG. 7, the corresponding LSP1 and LSP2 for the output port P0 has a first weight factor “w1” (= 20%), the corresponding LSP3-LSP7 for the output port P1 has a second weight factor “w2” (= 50%), and the corresponding LSP8-LSP10 for the output port P2 has a third weight factor “w3” (= 30%).

In the above-mentioned case, the number of FEC elements allocated for the LSP1 and LSP2 (which is indicated by “L0 and L1”), the number of FEC elements allocated for the LSP3-LSP7 (which is indicated by “L2-L6”), and the number of FEC elements allocated for the LSP8-LSP10 (which is indicated by “L7-L9”) are determined in accordance with the following equations.

$$L0-L1 = M \cdot w1 / (w1 + w2 + w3)$$

$$L2-L6 = M \cdot w2 / (w1 + w2 + w3)$$

$$L7-L9 = M \cdot w3 / (w1 + w2 + w3)$$

Substituting M=10, w1=20%, w2=50%, and w3=30% into the above equations yields L0-L1=2, L2-L6=5, and L7-L9=3. As in the FEC-label mapping table of FIG. 7, the FEC#1 and FEC#2 are allocated for the output port P0, the FEC#3-FEC#7 are allocated for the output port P1, and the FEC#8-FEC#10 are allocated for the output port P2.

In the ingress LSR 10 in which the FEC-label mapping table 36 of FIG. 7 is incorporated, the FEC retrieval unit 32 and the FEC-label mapping unit 35 allocate the plurality of FEC elements of the incoming traffic at the ingress node for the plurality of LSPs such that the number of FEC elements allocated for each of the LSPs is proportional to the predetermined weight factor of the physical link. The ATM cell generator unit 33 delivers the labeled traffic on the plurality of LSPs on an FEC-element

basis so as to route the labeled traffic through the MPLS network to the egress node.

In the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node are allocated for the plurality of label switched paths (LSPs) in the weight-factor-proportional manner, and the labeled traffic is delivered on the selected paths on an FEC-element basis. The path selection method and apparatus of the present embodiment is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. In particular, by determining the weight factors of the plurality of LSPs to appropriate values or the weight factors of the physical links, the traffic load dispersion to the selected paths can be effectively suited to the network management conditions specified by the network administrator.

A description will now be given of a fourth preferred embodiment of the path selection method and apparatus of the present invention with reference to FIG. 8 and FIG. 9.

FIG. 8 shows an FEC-label mapping table in the fourth preferred embodiment of the ingress LSR before an amount of the traffic delivered on the physical link P0 having a first priority exceeds a predetermined threshold. FIG. 9 shows an FEC-label mapping table in the fourth preferred embodiment of the ingress LSR after the amount of the traffic delivered on the physical link P0 has exceeded the threshold.

In the present embodiment, the ingress LSR 10 generally comprises the header analysis unit 31, the FEC retrieval unit 32, the FEC routing table 34, the ATM cell generator unit 33, the FEC-label mapping unit 35 and the FEC-label mapping table 36, which are essentially the same as corresponding elements in FIG. 2 except that the FEC-label mapping table 36 in the present embodiment is configured as shown in FIG. 8 or

FIG. 9, and the FEC-label mapping unit 35 produces the label value and the output port ID in response to the FEC ID by retrieving the FEC-label mapping table of FIG. 8 or FIG. 9.

Suppose that, in the present embodiment, one of a set of priorities is assigned for each of the plurality of physical links within the MPLS network. Any number of label switched paths may be allocated to each of the plurality of physical links such that it may be considered that the label switched paths assigned to the physical link have the priority of the physical link.

As shown in FIG. 8, in the FEC-label mapping table 36 of the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node of the MPLS network are allocated for the plurality of LSPs in order of the respective priorities of the plurality of LSPs before an amount of the traffic delivered on one of the plurality of physical links having a first priority exceeds a predetermined threshold. Specifically, in the example of FIG. 8, the FEC#1, FEC#2 and FEC#3 are allocated for the first-priority L0, L1 and L2 corresponding to the output port P0 before the amount of the traffic delivered on the physical link having the first priority exceeds the threshold.

As shown in FIG. 9, after the amount of the traffic delivered on the physical link having the first priority has exceeded the threshold, in the FEC-label mapping table 36 of the present embodiment, the remainders of the plurality of FEC elements of the incoming traffic at the ingress node of the MPLS network are allocated to others of the plurality of physical links having a second priority lower than the first priority. Specifically, in the example of FIG. 9, the FEC#4 and FEC#5 (the subsequent ones of the plurality of FEC elements of the incoming traffic) are allocated for the second-priority physical link

corresponding to the output port P1 after the amount of the traffic delivered on the physical link having the first priority has exceeded the threshold.

In the ingress LSR 10 in which the FEC-label mapping table 36 of FIG. 8 or FIG. 9 is incorporated, the FEC retrieval unit 32 and the FEC-label mapping unit 35 allocate the plurality of FEC elements of the incoming traffic at the ingress node for the plurality of LSPs in order of the respective priorities of the plurality of physical link before the amount of the traffic delivered on one of the plurality of physical links having a first priority exceeds a predetermined threshold. After the amount of the traffic on the physical link has exceeded the threshold, the FEC retrieval unit 32 and the FEC-label mapping unit 35 allocate the remainders of the plurality of FEC elements of the traffic for others of the plurality of LSPs having physical links of a second priority lower than the first priority. The ATM cell generator unit 33 delivers the labeled traffic on the plurality of LSPs on an FEC-element basis so as to route the labeled traffic through the MPLS network to the egress node, wherein, after the amount of the traffic on the physical link has exceeded the threshold, the traffic is routed to others of the plurality of LSPs having physical links of a second priority lower than the first priority.

In the present embodiment, an estimated amount of the traffic delivered on each of the plurality of physical links in the MPLS network can be calculated at the ingress LSR 10. For the purpose of the calculation of the estimated load on one of the plurality of physical links, the algorithm of the MPLS adaptive traffic engineering (MATE) proposed by the IETF (Internet Engineering Task Force) may be used.

The scheme of the MATE has the potential for more effectively optimizing the use of network resources as compared with that in the conventional IP-based

communication networks. In the present embodiment, which makes use of the scheme of the MATE, when the load of the traffic on a certain path becomes too heavy, another path having a larger capacity can be selected for transmitting the traffic through the other path with the large capacity, rather than through the overloaded path. Hence, by making use of the MATE, the path selection method and apparatus of the present embodiment can effectively disperse the incoming traffic load to the selected paths on the network and a long-term congestion state of the network can be avoided.

In the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node are allocated for the plurality of LSPs in order of the respective priorities of the plurality of LSPs, and the labeled traffic is delivered on the selected paths on an FEC-element basis. The path selection method and apparatus of the present embodiment is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. In particular, by assigning the first priority for main route paths of the network and the second priority for sub-route paths of the network, the traffic load dispersion to the selected paths can be effectively achieved.

A description will now be given of a fifth preferred embodiment of the path selection method and apparatus of the present invention with reference to FIG. 10.

FIG. 10 shows an FEC-label mapping table in the fifth preferred embodiment of the ingress LSR on the MPLS network.

In the present embodiment, the ingress LSR 10 generally comprises the header analysis unit 31, the FEC retrieval unit 32, the FEC routing table 34, the ATM cell generator unit 33, the FEC-label mapping unit 35 and the FEC-label mapping table 36, which are essentially the same as corresponding elements in FIG. 2 except that the FEC-

label mapping table 36 in the present embodiment is configured as shown in FIG. 10, and the FEC-label mapping unit 35 produces the label value and the output port ID in response to the FEC ID by retrieving the FEC-label mapping table of FIG. 10.

Suppose that, in the present embodiment, one of a set of priorities is assigned for each of the plurality of LSPs within the MPLS network, and a plurality of FEC priorities are allocated for the plurality of FEC elements of the incoming traffic at the ingress node. In the present embodiment, the correlation between the FEC IDs and the FEC priorities is provided by the FEC routing table shown in FIG. 3, and the FEC retrieval unit 32 supplies, to the FEC-label mapping unit 35, the correlated FEC priority, obtained from the specific FEC ID by retrieving the FEC routing table of FIG. 3.

As shown in FIG. 10, in the FEC-label mapping table 36 of the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node of the MPLS network are allocated for the plurality of LSPs in order of the respective priorities of the plurality of LSPs and in order of the respective FEC priorities of the plurality of FEC elements.

Specifically, in the example of FIG. 10, a first FEC priority "0" is allocated for the LSP1 (with the first priority) corresponding to the output port "P0", a second FEC priority "1" is allocated for the LSP2 (with the second priority) corresponding to the output port "P1", a third FEC priority "2" is allocated for the LSP3 (with the third priority) corresponding to the output port "P2", a fourth FEC priority "3" is allocated for the LSP4 (with the fourth priority) corresponding to the output port P3, and fifth through seventh FEC priorities "5" to "7" are allocated for the LSP5 (with the low priority) corresponding to the output port P4.

In the ingress LSR 10 in which the FEC-label mapping table 36 of FIG. 10 is incorporated, the FEC retrieval unit 32 and the FEC-label mapping unit 35 allocate the plurality of FEC elements of the incoming traffic at the ingress node for the plurality of LSPs in order of the respective priorities of the plurality of LSPs and in order of the respective FEC priorities of the plurality of FEC elements. The ATM cell generator unit 33 delivers the labeled traffic on the plurality of LSPs on an FEC-element basis so as to route the labeled traffic through the MPLS network to the egress node.

In the present embodiment, the plurality of FEC elements of the incoming traffic at the ingress node are allocated for the plurality of LSPs in order of the respective priorities of the plurality of LSPs and in order of the respective FEC priorities of the plurality of FEC elements, and the labeled traffic is delivered on the selected paths on an FEC-element basis. The path selection method and apparatus of the present embodiment is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. In particular, the traffic load dispersion to the selected paths can be achieved with increased flexibility by the allocation of the path priorities and the FEC priorities specified by the network administrator.

As has been described in the foregoing, the application of the path selection method and apparatus of the present invention to a packet-switched network makes it possible to disperse the incoming traffic load to the selected label switched paths.

Further, it is possible to more effectively optimize the use of network resources as compared with that in the conventional IP-based communication networks. In addition, the traffic load dispersion to the selected paths can be achieved with increased flexibility by the allocation of the path priorities and the FEC priorities specified by the network

administrator.

In each of the intermediate label switching routers (LSRs) 13 through 16 on the MPLS network, the incoming traffic at the input of each intermediate LSR is a labeled ATM cell. Each intermediate LSR reads an input label from the header of the labeled ATM cell, produces an output label corresponding to the input label, attaches the output label in the header of an outgoing ATM cell, and delivers the labeled ATM cell from its output port to a downstream LSR on the MPLS network.

FIG. 11 is a block diagram of one of the intermediate LSRs 13 through 16 on the MPLS network.

In the intermediate LSR of FIG. 11, an incoming labeled ATM cell is received at a header analysis unit 41. The header analysis unit 41 analyzes the header of the ATM cell, reads, from the header, a label value (called the input label), and supplies the input label to a label retrieval unit 43.

The label retrieval unit 43 is connected to a label mapping table 44. The label retrieval unit 43 produces an output label value (called the output label) and an output port ID from the received input label by retrieving the label mapping table 44 based on the input label.

FIG. 12 shows a label mapping table 44 in the intermediate LSR of FIG. 11. As shown in FIG. 12, the label mapping table 44 contains a plurality of records corresponding to a plurality of predetermined input labels, such as IL0, IL1, etc. Each record includes an output label field and an output port ID field, which correspond to one of the predetermined input labels.

In the label mapping table of FIG. 12, the output label field defines an output label or a label value corresponding to one of the predetermined input labels, such as OL0, OL1, etc. The output port ID field defines an output port ID corresponding to one of the predetermined input labels, such as P0, P1, etc.

5 The label retrieval unit 43 supplies the output label and the output port ID, obtained from the label mapping table 44, to a label attaching unit 42.

10 The label attaching unit 42 receives the ATM cell sent by the header analysis unit 41, and attaches the output label, received from the label retrieval unit 43, in the header (the VPI/VPO field) of the received ATM cell. The label attaching unit 42 delivers the labeled ATM cell from its output port indicated by the output port ID (sent by the label retrieval unit 43), to the individual downstream LSR on the MPLS network.

FIG. 13 is a block diagram of the egress LSR 12 on the MPLS network.

15 In the egress LSR of FIG. 13, an incoming labeled ATM cell is received at a header analysis unit 51. The header analysis unit 51 analyzes the header of the ATM cell, reads, from the header, a label value (called the input label), and supplies the input label to an FEC-label mapping unit 53.

20 The FEC-label mapping unit 53 is connected to an FEC-label mapping table 55. The FEC-label mapping unit 53 produces an FEC ID (called output label) from the received input label by retrieving the FEC-label mapping table 55 based on the input label. The FEC-label mapping table 55 is configured in a manner that is essentially the same as the FEC-label mapping table shown in FIG. 4. The FEC-label mapping unit 53 supplies the FEC ID (the output label), obtained from the FEC-label mapping table 55, to an FEC retrieval unit 54.

The FEC retrieval unit 54 is connected to an FEC routing table 56. The FEC retrieval unit 54 produces a destination IP address and a destination TCP/UDP port ID from the received FEC ID by retrieving the FEC routing table 56 based on the FEC ID (the output label). The FEC routing table 56 is configured in a manner that is essentially the same as the FEC routing table shown in FIG. 3. The FEC retrieval unit 54 supplies the destination IP address and the destination TCP/UDP port ID, obtained from the FEC routing table 56, to an IP forwarding processor unit 52.

The IP forwarding processor unit 52 receives the ATM cell sent by the header analysis unit 51, and reassembles the IP data packet from the received ATM cell. The IP forwarding processor unit 52 attaches the destination IP address, received from the FEC retrieval unit 54, in the header of the reassembled IP data packet. The IP forwarding processor unit 52 delivers the labeled IP data packet from its output port indicated by the destination TCP/UDP port ID (received from the FEC retrieval unit 54) to the destination of the external IP network (indicated by the destination IP address).

The present invention is not limited to the above-described embodiments, and variations and modifications may be made without departing from the scope of the present invention. For example, in the above-described embodiments, data communication in the traffic engineering area between the ingress node (the ingress LSR 10) and the egress node (the egress LSR 12) is carried out through the ATM network. Alternatively, an IP packet-switched network, a frame relay network, a point-to-point link or the like may be used, instead of the ATM network, as the communication medium through which the data is transmitted.

In the above-described embodiments, the ingress LSR 10 of FIG. 1 corresponds to

the ingress node or the ingress-node apparatus. The egress LSR 12 of FIG. 1 corresponds to the egress node. The elements 32, 34, 35 and 36 of FIG. 2 wherein the FEC routing table 34 is configured as shown in FIG. 3 and the FEC-label mapping table 36 is configured as shown in any of FIG. 4, FIG. 5, FIG. 6, FIG. 7, FIG. 8 (or FIG. 9) and FIG. 10, correspond to the FEC allocation unit or the allocating step. The elements 31 and 33 of FIG. 2 correspond to the traffic delivery unit or the delivering step.

As has been described above the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. Reversing of a sequence of data packets sent by the same terminal, at the egress node of the network can be effectively reduced.

Further, the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. Concentration of the traffic load on a specific path of the network can be effectively reduced.

Further, the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. The traffic load dispersion to the selected paths can be effectively suited to the network management conditions specified by a network administrator.

In addition, the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. By assigning the first

priority for main route paths of the network and the second priority for sub-route paths of the network, the traffic load dispersion to the selected paths can be effectively achieved.

Further, the method for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. The traffic load dispersion to the selected paths can be achieved with increased flexibility by the allocation of the path priorities and the FEC priorities specified by a network administrator.

The apparatus for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. Reversing of a sequence of data packets sent by the same terminal, at the egress node of the network can be effectively prevented.

The apparatus for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. Concentration of the traffic load on a specific path of the network can be effectively avoided.

The apparatus for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. The traffic load dispersion to the selected paths can be effectively suited to the network management conditions specified by a network administrator.

The apparatus for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on

the network and in optimizing the use of network resources. By assigning the first priority for main route paths of the network and the second priority for sub-route paths of the network, the traffic load dispersion to the selected paths can be effectively achieved.

The apparatus for selection of paths to route the incoming traffic through the communication network is effective in dispersing the traffic load to the selected paths on the network and in optimizing the use of network resources. The traffic load dispersion to the selected paths can be achieved with increased flexibility by the allocation of the path priorities and the FEC priorities specified by a network administrator.

5

00507-00000000

CLAIMS

1. A method for selecting paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is
5 labeled and delivered through the network to the egress node, said method comprising the steps of:

allocating a plurality of forwarding elements of the incoming traffic at the ingress node to each label switched path of the plurality of label switched paths; and

delivering the labeled traffic on the plurality of label switched paths so as to route
10 the labeled traffic through the network to the egress node.

2. The apparatus of claim 1, wherein the delivery step delivers the labeled traffic on a forwarding elements basis.

3. The apparatus of claim 1, wherein the forwarding elements are forwarding
15 equivalent class elements FEC and the delivery step delivers the labeled traffic on an FEC elements basis.

4. The method of claim 1, wherein the allocating step further allocates the
20 plurality of forwarding elements equally among the plurality of label switched paths.

5. The method of claim 1, wherein each label switched path of the plurality of label switched paths is associated with a physical link.

6. The method of claim 5, wherein the allocating step further allocates the plurality of forwarding elements equally among a plurality of physical links.

5 7. A method for selecting paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, each label switched path of the plurality of label switched paths being associated with a physical link having a data rate, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, said method comprising the steps of:

 allocating a plurality of forwarding elements of the incoming traffic at the ingress node to each label switched path of the plurality of label switched paths, the number of forwarding elements allocated to each of the label switched paths being proportional to the data rate of the respective associated physical link; and

 delivering the labeled traffic on the plurality of label switched paths on a forwarding element basis so as to route the labeled traffic through the network to the egress node.

8. A method for selecting paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, said method comprising the steps of:

allocating a plurality of forwarding elements of the incoming traffic at the ingress node to the plurality of label switched paths, each respective label switched path having a weight factor, and the number of forwarding elements allocated to each of the label switched paths being proportional to the weight factor of the label switched path; and

5 delivering the labeled traffic on the plurality of label switched paths on a forwarding element basis so as to route the labeled traffic through the network to the egress node.

9. The method of claim 8, wherein each label switched path of the plurality of label switched paths is associated with a physical link having said weight factor.

10. A method for selecting paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, said method comprising the steps of:

assigning a priority from a set of priorities to each label switched path of the plurality of label switched paths;

allocating a plurality of forwarding elements of the incoming traffic at the ingress node to the plurality of label switched paths in order of the respective priorities of the plurality of label switched paths, the incoming traffic being allocated to label switched paths having a first priority until an amount of traffic exceeds a predetermined threshold; and

delivering the labeled traffic on the plurality of label switched paths on a forwarding element basis so as to route the labeled traffic through the network to the egress node, wherein after the amount of traffic delivered on said label switched paths having a first priority has exceeded the predetermined threshold, the traffic is allocated to others of the plurality of label switched paths having a second priority lower than the first priority of said one of the plurality of label switched paths.

11. A method for selecting paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, said method comprising the steps of:

allocating a plurality of forwarding priorities to a plurality of forwarding elements of the incoming traffic at the ingress node;

assigning a priority from a set of priorities to each label switched path of the plurality of label switched paths;

allocating the plurality of forwarding elements of the incoming traffic at the ingress node to the plurality of label switched paths in order of the respective priorities of the plurality of label switched paths and in order of the respective forwarding priorities of the plurality of forwarding elements; and

delivering the labeled traffic on the plurality of label switched paths on a forwarding element basis so as to route the labeled traffic through the network to the egress node.

12. The method of claim 11, wherein after an amount of traffic delivered on a label switched path having a first priority has exceeded a predetermined threshold, the traffic is allocated to other label switched paths of the plurality of label switched paths having a second priority lower than the label switched path having a first priority.

13. An ingress-node apparatus that selects paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, said apparatus comprising:

an allocation unit for allocating a plurality of forwarding elements of the incoming traffic at the ingress node to each label switched path of the plurality of label switched paths; and

a traffic delivery unit for delivering the labeled traffic on the plurality of label switched paths so as to route the labeled traffic through the network to the egress node.

14 . The apparatus of claim 13, wherein the traffic delivery unit delivers the labeled traffic on a forwarding elements basis.

15. The apparatus of claim 13, wherein the forwarding elements are forwarding equivalent class elements FEC and the traffic delivery unit delivers the labeled traffic on an FEC elements basis.

16. The apparatus of claim 13, wherein the allocation unit further allocates the plurality of forwarding elements equally among the plurality of label switched paths.

17. The method of claim 13, wherein each label switched path of the plurality of label switched paths is associated with a physical link.

18. The method of claim 17, wherein the allocation unit further allocates the plurality of forwarding elements equally among a plurality of physical links.

19. An ingress-node apparatus that selects paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, said apparatus comprising:

an allocation unit for allocating a plurality of forwarding elements of the incoming traffic at the ingress node to the plurality of label switched paths, the respective label switched paths being associated with a physical link having a data rate, and the number of forwarding elements allocated to each of the label switched paths being proportional to the data rate of the associated physical link; and

a traffic delivery unit for delivering the labeled traffic on the plurality of label switched paths on a forwarding element basis so as to route the labeled traffic through the network to the egress node.

20. An ingress-node apparatus that selects paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, said apparatus comprising:

5 an allocation unit for allocating a plurality of forwarding elements of the incoming traffic at the ingress node to the plurality of label switched paths, each respective label switched path having a weight factor, and the number of forwarding elements allocated for each of the label switched paths being proportional to the weight factor of the respective label switched path; and

10 a traffic delivery unit for delivering the labeled traffic on the plurality of label switched paths on a forwarding element basis so as to route the labeled traffic through the network to the egress node.

21. An ingress-node apparatus that selects paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, and a priority of a set of priorities is assigned to each label switched path of the plurality of label switched paths, said apparatus comprising:

20 an allocation unit for allocating a plurality of forwarding elements of the incoming traffic at the ingress node to each label switched path of the plurality of label switched paths in order of the respective priorities of the plurality of label switched paths, an amount of traffic is delivered to label switched paths having a first priority until the

amount exceeds a predetermined threshold; and

a traffic delivery unit for delivering the labeled traffic on the plurality of label switched paths on a forwarding element basis so as to route the labeled traffic through the network to the egress node, wherein after the amount of traffic delivered to the label switch paths having a first priority has exceeded the predetermined threshold, the traffic is routed to others of the plurality of label switched paths having a second priority lower than the label switched paths having a first priority.

22. An ingress-node apparatus that selects paths to route incoming traffic through a communication network in which a plurality of label switched paths between an ingress node and an egress node are provided, and the incoming traffic at the ingress node is labeled and delivered through the network to the egress node, a plurality of forwarding priorities being allocated for a plurality of forwarding elements of the incoming traffic at the ingress node, and a priority of a set of priorities being assigned to each label switched path of the plurality of label switched paths, said apparatus comprising:

an allocation unit for allocating the plurality of forwarding elements of the incoming traffic at the ingress node to the plurality of label switched paths in order of the respective priorities of the plurality of label switched paths and in order of the respective forwarding priorities of the plurality of forwarding elements; and

a traffic delivery unit for delivering the labeled traffic on the plurality of label switched paths on a forwarding element basis so as to route the labeled traffic through the network to the egress node.

23. The apparatus of claim 22, wherein after an amount of traffic delivered to a label switch path having a first priority has exceeded a predetermined threshold, the traffic is routed to other label switched paths of the plurality of label switched paths having a lower priority than the label switched path having a first priority.

5

24. The apparatus of claim 23, wherein the label switched path having a first priority is a plurality of label switched paths having a first priority.

25. A communication network in which a plurality of label switched paths are provided and incoming traffic is labeled and delivered through the network, said communications network comprising:

an ingress unit where the incoming traffic is received and grouped into a plurality of forwarding elements, each forwarding element of the plurality of forwarding elements is allocated to a label switched path of the plurality of label switched paths, and the forwarding elements are labeled and delivered to the respective label switched paths so as to route the labeled traffic through the network; and

an egress unit that receives the labeled traffic from the plurality of label switched paths and removes the labels and reassembles the outgoing traffic.

26. The communication network of claim 25, wherein the incoming traffic is grouped into a plurality of forwarding equivalent class (FEC) elements and the FEC elements are allocated to the plurality of label switched paths on an FEC element basis.

20

27. The communication network of claim 26, further comprising:

an allocating unit for equally allocating the FEC elements of the incoming traffic at the ingress node among the plurality of label switch paths.

5

28. The communication network of claim 26, further comprising:

an allocating unit for allocating a number of FEC elements of the incoming traffic at the ingress node among the plurality of label switched paths in proportion to a data rate of each label switched path, wherein each label switched path of the plurality of label switch paths being associated with the physical link having a respective data rate.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197

32. The communication network of claim 26, further comprising:

an assigning unit for assigning each label switched path of the plurality of label switch paths a priority from among a set of priorities,

an allocating unit for allocating the FEC elements of the incoming traffic at the ingress node to the label switched paths in order of the respective priorities of the plurality of label switched paths, and allocating the traffic to others of the plurality of label switched paths having a second priority lower than label switched paths having a first priority after an amount of traffic delivered to the label switched paths having a first priority has exceeded a predetermined threshold.

33. The communication network of claim 26, further comprising:

an assigning unit for assigning the FEC elements of the incoming traffic at the ingress node FEC priorities from a plurality of FEC priorities,

a mapping unit for mapping a priority from among a set of priorities to each label switched path of the plurality of label switch paths,

an allocating unit for allocating the FEC elements of the incoming traffic at the ingress node to the label switched paths in order of the respective priorities of the plurality of label switched paths and in order of the respective FEC priorities of the plurality of FEC elements, and allocating the traffic to others of the plurality of label switched paths having a second priority lower than label switched paths with a first priority after an amount of traffic delivered to the label switched paths having a first priority has exceeded a predetermined threshold.

ABSTRACT

A method and apparatus for selecting paths to route incoming traffic through a data communication network, which is capable of effectively dispersing the traffic load to the selected paths on the network and effectively optimizing the use of network resources. In a communication network, a plurality of label switched paths between an ingress node and an egress node are provided. Incoming traffic at the ingress node is labeled and delivered through the network to the egress node. In a method and apparatus for selecting paths to route the incoming traffic through the network, a plurality of forwarding equivalent class elements (FEC) of the incoming traffic at the ingress node are allocated for the plurality of label switched paths. The labeled traffic is delivered on the plurality of label switched paths on an FEC-element basis so as to route the labeled traffic through the network to the egress node. The traffic load on the respective label switched paths can be effectively dispersed and the sequence of data packets, sent by the same terminal, may be maintained.

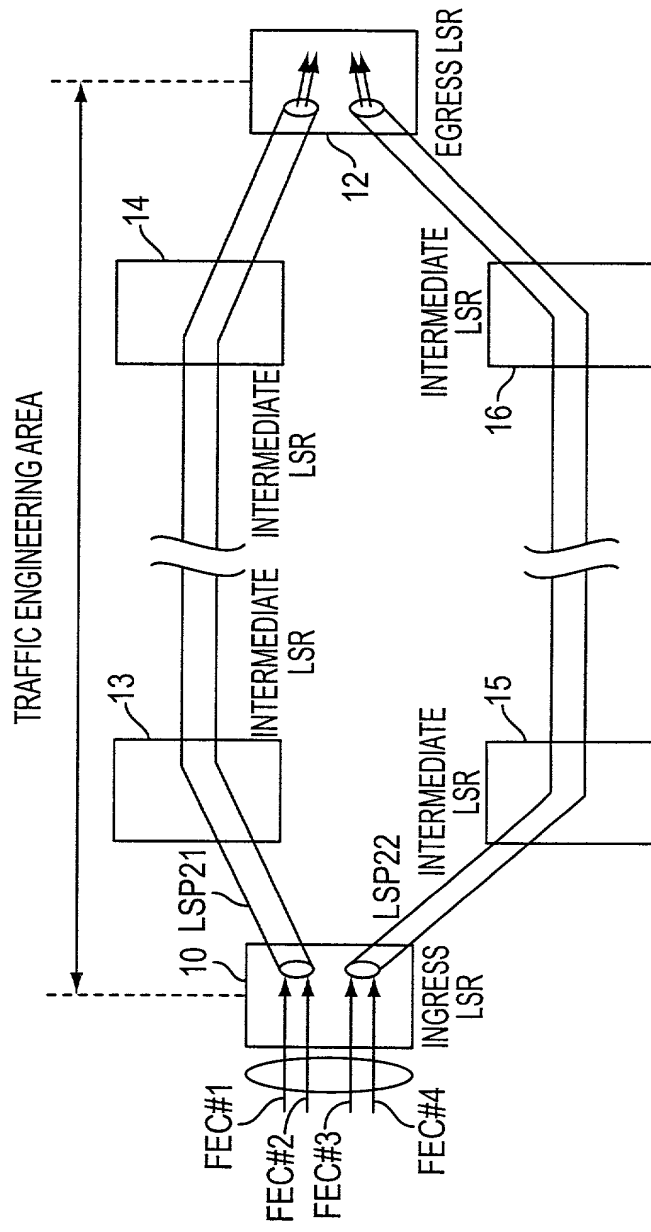


FIG. 1

FIG. 2

FEC ID	SOURCE		DESTINATION		SOURCE		DESTINATION		FEC
	IP ADDRESS	IP ADDRESS	IP ADDRESS	IP ADDRESS	TCP/UDP PORT ID	TCP/UDP PORT ID	TCP/UDP PORT ID	PRIORITY	
#1	nul 1	10.25.1.1	nul 1	nul 1	nul 1	nul 1	nul 1	1	
#2	nul 1	10.25.2.0/24	nul 1	nul 1	nul 1	nul 1	nul 1	1	
#3	1.2.3.4	nul 1	20	20	20	20	20	0	
#4	nul 1	10.25.3.0/24	80	80	80	80	80	0	
.	
.	
.	

FIG. 3

FEC ID	LABEL VALUE	OUTPUT PORT ID
#1	L0	P0
#2	L1	P1
#3	L2	P2
#4	L3	P2
⋮	⋮	⋮

FIG. 4

Year	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100																																																																																																																																																																																																
Population (millions)	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6	3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	4.6	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.4	5.5	5.6	5.7	5.8	5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.6	6.7	6.8	6.9	7.0	7.1	7.2	7.3	7.4	7.5	7.6	7.7	7.8	7.9	8.0	8.1	8.2	8.3	8.4	8.5	8.6	8.7	8.8	8.9	9.0	9.1	9.2	9.3	9.4	9.5	9.6	9.7	9.8	9.9	10.0	10.1	10.2	10.3	10.4	10.5	10.6	10.7	10.8	10.9	11.0	11.1	11.2	11.3	11.4	11.5	11.6	11.7	11.8	11.9	12.0	12.1	12.2	12.3	12.4	12.5	12.6	12.7	12.8	12.9	13.0	13.1	13.2	13.3	13.4	13.5	13.6	13.7	13.8	13.9	14.0	14.1	14.2	14.3	14.4	14.5	14.6	14.7	14.8	14.9	15.0	15.1	15.2	15.3	15.4	15.5	15.6	15.7	15.8	15.9	16.0	16.1	16.2	16.3	16.4	16.5	16.6	16.7	16.8	16.9	17.0	17.1	17.2	17.3	17.4	17.5	17.6	17.7	17.8	17.9	18.0	18.1	18.2	18.3	18.4	18.5	18.6	18.7	18.8	18.9	19.0	19.1	19.2	19.3	19.4	19.5	19.6	19.7	19.8	19.9	20.0	20.1	20.2	20.3	20.4	20.5	20.6	20.7	20.8	20.9	21.0	21.1	21.2	21.3	21.4	21.5	21.6	21.7	21.8	21.9	22.0	22.1	22.2	22.3	22.4	22.5	22.6	22.7	22.8	22.9	23.0	23.1	23.2	23.3	23.4	23.5	23.6	23.7	23.8	23.9	24.0	24.1	24.2	24.3	24.4	24.5	24.6	24.7	24.8	24.9	25.0	25.1	25.2	25.3	25.4	25.5	25.6	25.7	25.8	25.9	26.0	26.1	26.2	26.3	26.4	26.5	26.6	26.7	26.8	26.9	27.0	27.1	27.2	27.3	27.4	27.5	27.6	27.7	27.8	27.9	28.0	28.1	28.2	28.3	28.4	28.5	28.6	28.7	28.8	28.9	29.0	29.1	29.2	29.3	29.4	29.5	29.6	29.7	29.8	29.9	30.0	30.1	30.2	30.3	30.4	30.5	30.6	30.7	30.8	30.9	31.0	31.1	31.2	31.3	31.4

FEC ID	LABEL VALUE	OUTPUT PORT ID
#1	L0	P0
#2	L0	P0
#3	L1	P1
#4	L1	P1
#5	L2	P2
#6	L2	P2
#7	L3	P3
#8	L3	P3
#9	L4	P4
#10	L4	P4

FIG. 5

FEC ID	LABEL VALUE	OUTPUT PORT ID	
#1	L0	P0	} PHYSICAL LINK 1
#2	L1	P1	
#3	L2	P1	} PHYSICAL LINK 2
#4	L3	P1	
#5	L4	P2	} PHYSICAL LINK 3
#6	L5	P2	
#7	L6	P2	
#8	L7	P2	
#9	L8	P2	
#10	L9	P2	

FIG. 6

FEC ID	LABEL VALUE	OUTPUT PORT ID	
#1	L0	P0	PHYSICAL LINK 1
#2	L1	P0	
#3	L2	P1	PHYSICAL LINK 2
#4	L3	P1	
#5	L4	P1	
#6	L5	P1	
#7	L6	P1	
#8	L7	P2	PHYSICAL LINK 3
#9	L8	P2	
#10	L9	P2	

FIG. 7

Parameter	Value	Standard Error	z	P	95% CI
Intercept	1.00	0.00			
Age	0.01	0.01	0.10	0.92	-0.01, 0.03
Gender	0.01	0.01	0.10	0.92	-0.01, 0.03
Education	0.01	0.01	0.10	0.92	-0.01, 0.03
Income	0.01	0.01	0.10	0.92	-0.01, 0.03
Health status	0.01	0.01	0.10	0.92	-0.01, 0.03
Family size	0.01	0.01	0.10	0.92	-0.01, 0.03
Marital status	0.01	0.01	0.10	0.92	-0.01, 0.03
Religious beliefs	0.01	0.01	0.10	0.92	-0.01, 0.03
Community support	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare access	0.01	0.01	0.10	0.92	-0.01, 0.03
Health insurance	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare quality	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare cost	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare availability	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare accessibility	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare affordability	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare acceptability	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare appropriateness	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare effectiveness	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare efficiency	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare equity	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare safety	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare quality of care	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare patient satisfaction	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare provider satisfaction	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system performance	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system efficiency	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system effectiveness	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system equity	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system safety	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system quality of care	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system patient satisfaction	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system provider satisfaction	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system performance	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system efficiency	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system effectiveness	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system equity	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system safety	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system quality of care	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system patient satisfaction	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system provider satisfaction	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system performance	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system efficiency	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system effectiveness	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system equity	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system safety	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system quality of care	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system patient satisfaction	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system provider satisfaction	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system performance	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system efficiency	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system effectiveness	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system equity	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system safety	0.01	0.01	0.10	0.92	-0.01, 0.03
Healthcare system quality of care	0.01	0.01	0.10	0.92	

FEC ID	LABEL VALUE	OUTPUT PORT ID
#1	L0	P0
#2	L1	P0
#3	L2	P0

PHYSICAL LINK 1
(HIGH PRIORITY)

TIME POINT THAT
AMOUNT OF TRAFFIC
ON LINK 1 EXCEEDS
THRESHOLD

FIG. 8

FEC ID	LABEL VALUE	OUTPUT PORT ID	
#1	L0	P0	} PHYSICAL LINK 1 (HIGH PRIORITY)
#2	L1	P0	
#3	L2	P0	
#4		P1	} PHYSICAL LINK 2 (LOW PRIORITY)
#5		P1	

FIG. 9

FIG. 10

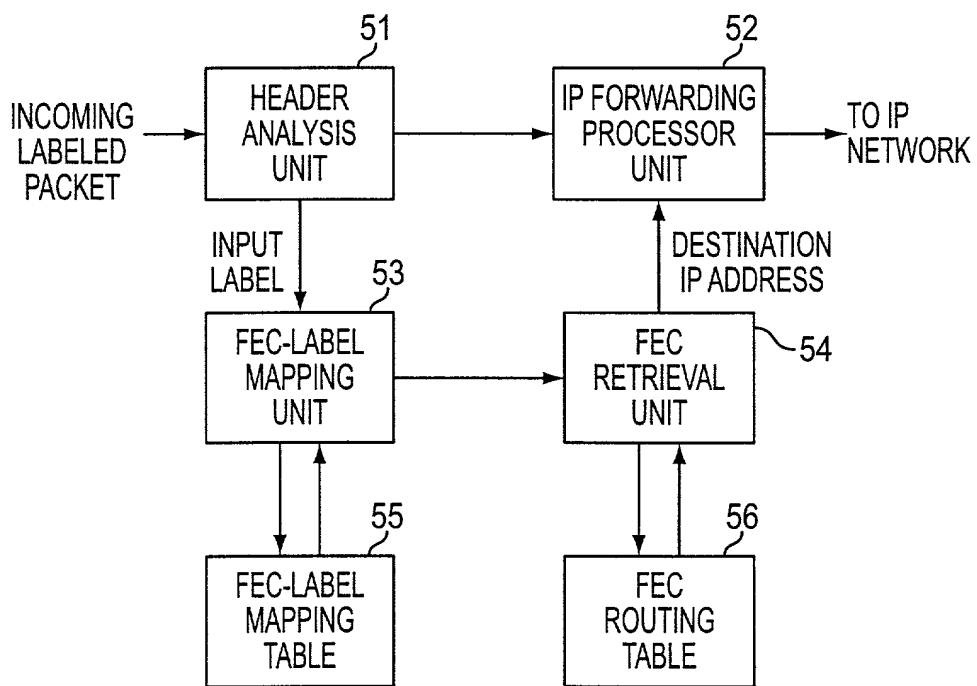


FIG. 13


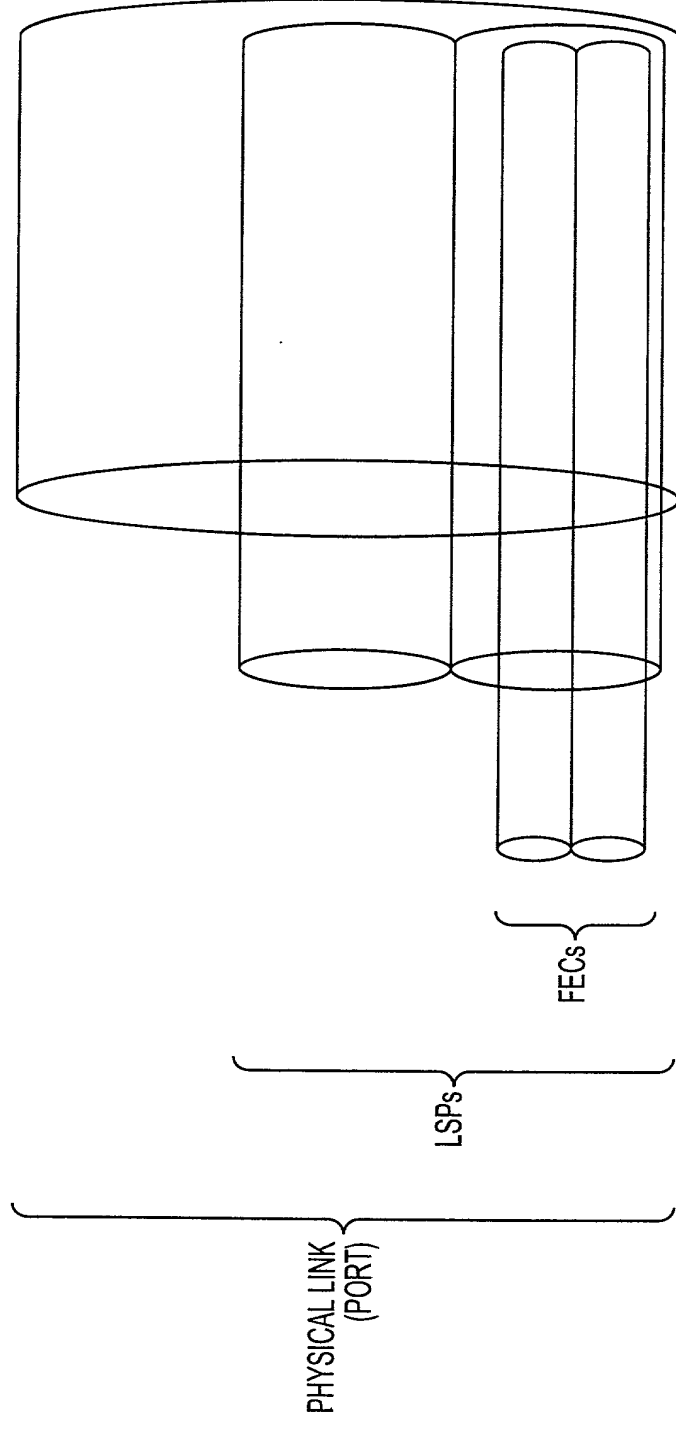


FIG. 14

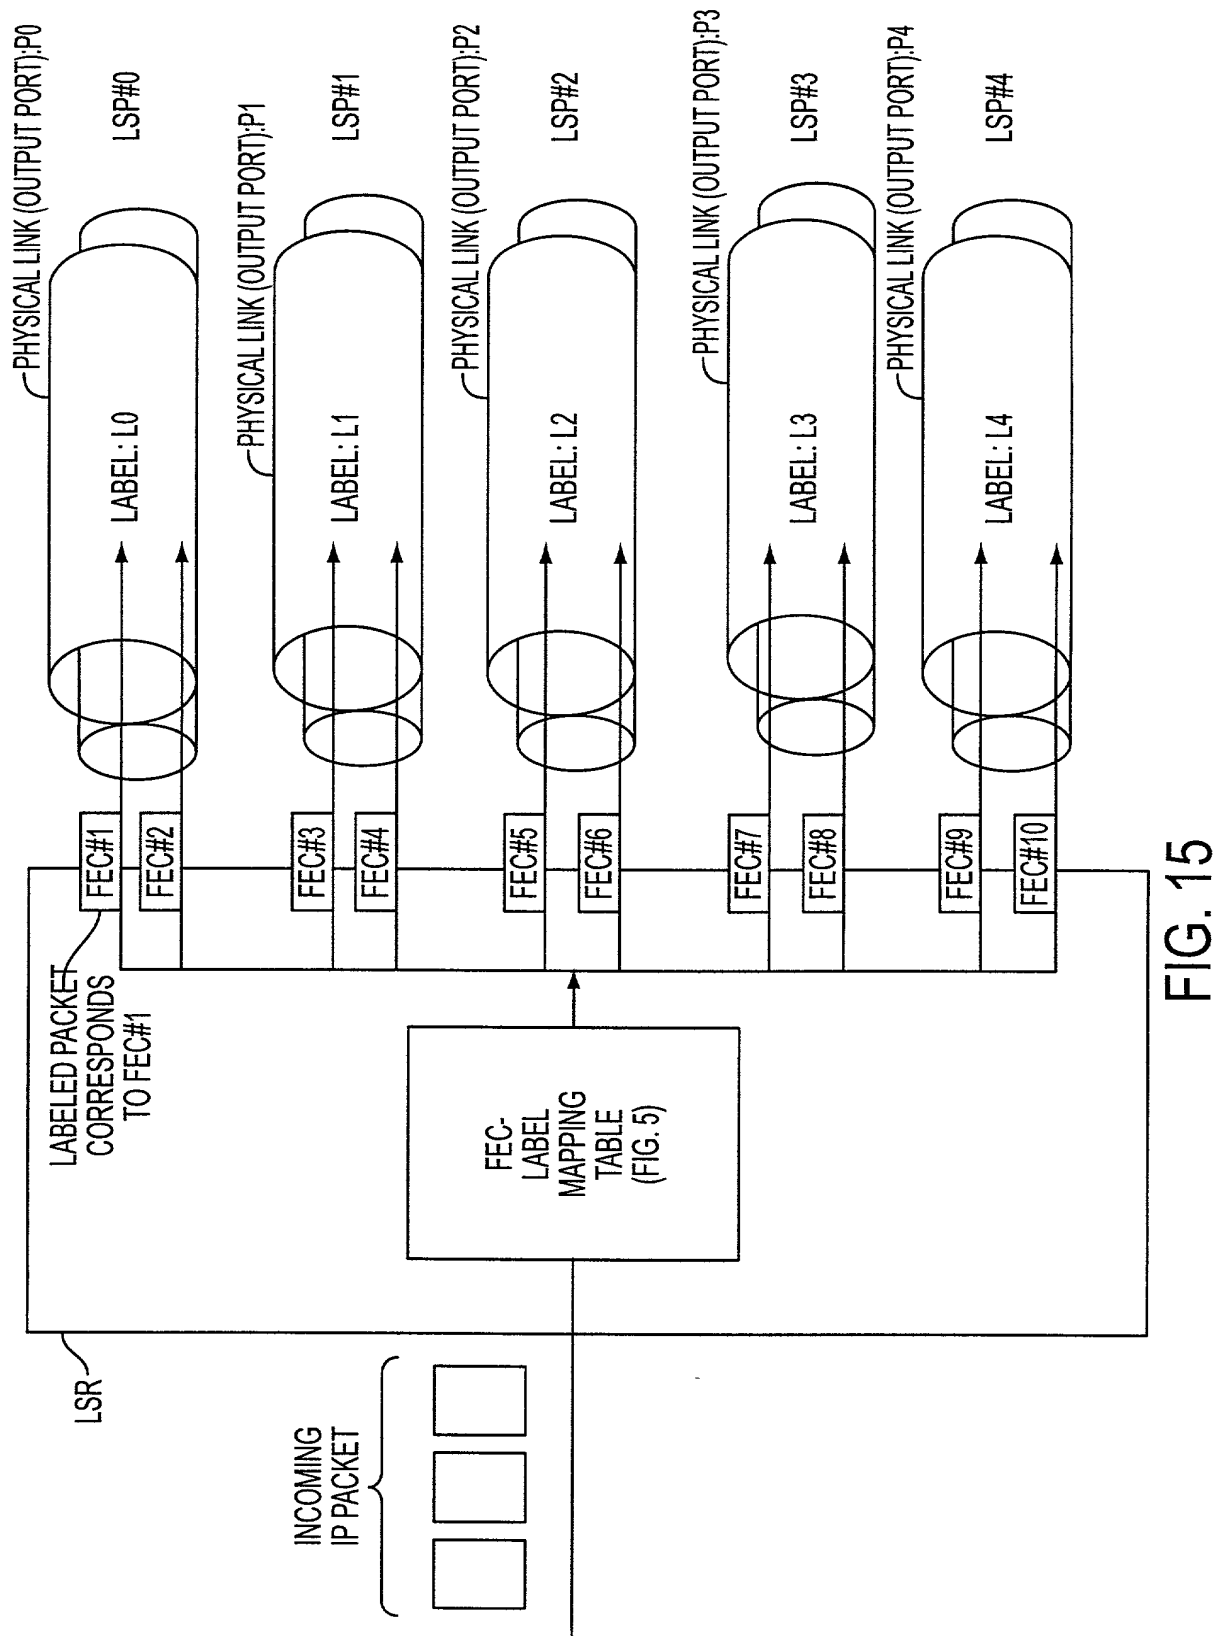

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR SELECTION

OF PATHS ON A COMMUNICATION NETWORK

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on _____
(if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
Pat. Appln. No. 11-321591

Japan

(Number)
(番号)

(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

11/November/1999

(Day/Month/Year Filed)
(出願年月日)

(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

書類送付先

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT, Reg. No. 23,072 and Leonard COOPER Reg. No. 27,625
Send Correspondence to:

HELFGOTT & KARAS, P.C.
Empire State Building, 60th Floor
New York, New York 10118
United States of America

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Helfgott & Karas, P.C.
(212) 643-5000

唯一または第一発明者名

Full name of sole or first inventor

Koji Nakamichi

発明者の署名

日付

Inventor's signature

Date

Koji Nakamichi November 7, 2000

住所

Residence

Kawasaki, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address

c/o FUJITSU LIMITED,
1-1, Kamikodanaka 4-chome, Nakahara-ku,
Kawasaki-shi, Kanagawa, 211-8588 Japan

第二共同発明者

Full name of second joint inventor, if any

Yutaka Ezaki

第二共同発明者

日付

Second inventor's signature

Date

Yutaka Ezaki November 7, 2000

住所

Residence

Kawasaki, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address

c/o FUJITSU LIMITED,
1-1, Kamikodanaka 4-chome, Nakahara-ku,
Kawasaki-shi, Kanagawa, 211-8588 Japan

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Toshio Soumiya		
第三共同発明者	日付	Third inventor's signature <i>T. Soumiya</i>	Date November 7, 2000
住 所	Residence Kawasaki, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan		
第四共同発明者	Full name of fourth joint inventor, if any Kenya Takashima		
第四共同発明者	日付	Fourth inventor's signature <i>高島 研也</i>	Date November 7, 2000
住 所	Residence Kawasaki, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211-8588 Japan		

第五共同発明者	Full name of fifth joint inventor, if any		
第五共同発明者	日付	Fifth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		
第六共同発明者	Full name of sixth joint inventor, if any		
第六共同発明者	日付	Sixth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

(第七以降の共同発明者についても同様に
記載し、署名をすること)

(Supply similar information and signature for
seventh and subsequent joint inventors.)

THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of: **Koji NAKAMICHI et al.**

Filed : **Concurrently herewith**

For : **METHOD AND APPARATUS FOR SELECTION OF
PATHS ON A COMMUNICATION NETWORK**

Serial No. : **Concurrently herewith**

November 9, 2000


Assistant Commissioner of Patents
Washington, D.C. 20231

SUB-POWER OF ATTORNEY

S I R:

I, Aaron B. Karas, Reg. No. 18,923 attorney of record
herein, do hereby grant a sub-power of attorney to Linda S.
Chan, Reg. No. 42,400, Harris A. Wolin, Reg. No. 39,432 and
Brian S. Myers, Reg. No. 46,947 to act and sign in my behalf in
the above-referenced application.

Respectfully submitted,

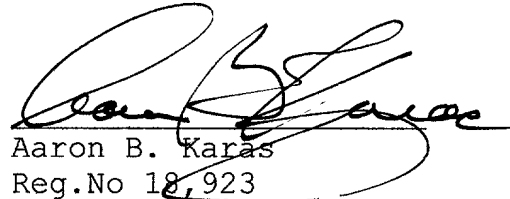
Aaron B. Karas
Reg.No 18,923

HELFGOTT & KARAS, P.C.
60th FLOOR
EMPIRE STATE BUILDING
NEW YORK, NY 10118
DOCKET NO.:FUJI17.300
LHH:power

Filed Via Express Mail

Rec. No.:EL522396114US

On: November 9, 2000

By: Lydia Gonzalez

Any fee due as a result of this paper,
not covered by an enclosed check may
be charged on Deposit Acct. No. 08-
1634.

005017 08260460